HAYWARD

PowerFlo II

YEARS OF WARRANTY 3 STANDARD

SMALL PUMP FOR OUTSTANDING RESULTS!

- **Pump designed for small pools** and/or above ground pools
- **Exceptional performance**, one of the best in its category
- Recommended for pools **up to 100 m³***

* Calculation based on 6 hours turnover






Easy access to the pre-filter through the quarter turn cover




Drainage caps to make wintering easier




50 mm outlet or ø 32/38 mm fluted adapters



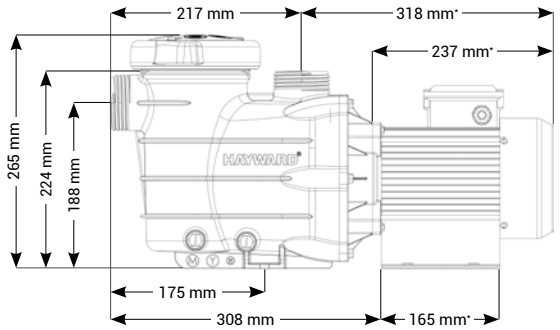

Pressure (mbar)

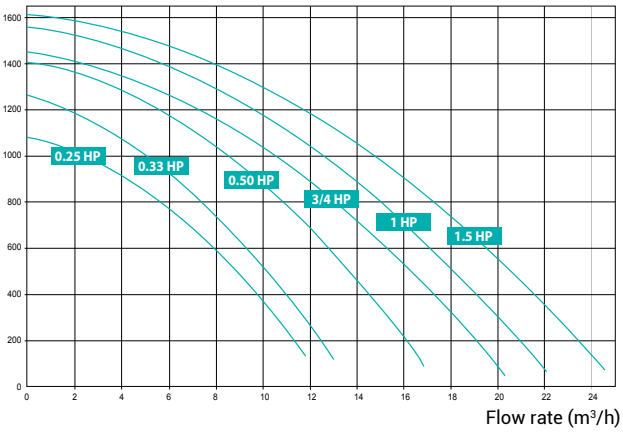

Flow rate (m³/h)

Technical Specifications

Max. water temp.	35°C
Adapter	32/38 mm
Mechanical seal	AISI 304, compatible with salt treatment (salt chlorinator)
Motor specifications	Class F, IP55, 50 Hz, 2 Poles
Housing/impeller/strainer/lid	PP+GF/Noryl® + GF/ABS/PC
Prefilter basket size	1.1 L

	Type	Length	Weight	Adaptors	Flow rate*	Input Power P1	Output Power P2	Amperage	Quantity per pallet	Item.
POWERFLO II	0.25 HP	504 mm	7.68 kg	50 and 32/38 mm	5.4 m³/h	380 W	300 W	1.6 A	32	SP8102XE31
	0.33 HP	504 mm	7.76 kg	50 and 32/38 mm	7.3 m³/h	470 W	320 W	2 A	32	SP8103XE61
	0.5 HP	504 mm	8.65 kg	50 and 32/38 mm	10.8 m³/h	610 W	560 W	2.6 A	32	SP8105XE81
	3/4 HP	504 mm	9.16 kg	50 and 32/38 mm	13 m³/h	790 W	610 W	3.4 A	32	SP8107XE111
	1 HP	504 mm	9.16 kg	50 and 32/38 mm	15 m³/h	920 W	730 W	4 A	32	SP8110XE161
	1.5 HP	535 mm	11.3 kg	50 and 32/38 mm	17.2 m³/h	1110 W	900 W	4.8 A	32	SP8115XE221

* under 8 m water column pressure