
SP1424 & SP1425 Series
Return Inlets

Wall Inlets
Adjustable and Non-Adjustable



White Body and Grate.

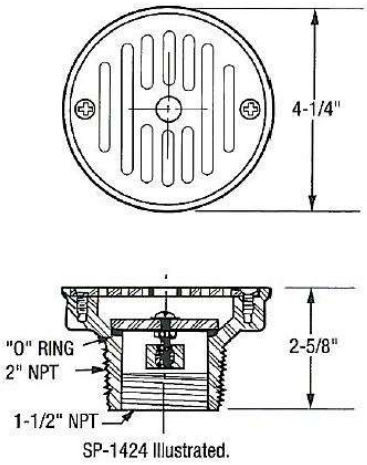

SP-1424 Illustrated.


Model No.	Description
SP-1424	Adj. 1 ½" FIP x 2" MIP
SP-1424S	Adj. 1 ½" SKT x 2" MIP

SP-1424 provides full range of flow adjustments, line testing and winterizing. Internal spinner valve disc and O-Ring is adjustable thru center hole in grate.

Floor Inlet
Fully Adjustable



White Body and Flusher Diffuser Plate.

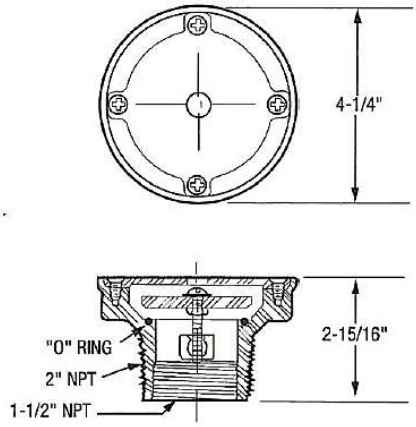

Model No.	Description
SP-1425	1 ½" FIP x 2" MIP
SP-1425S	1 ½" SKT x 2" MIP

Installs in pool floor to provide uniform, efficient, high velocity 360° distribution of water. Top diffuser plate is stationary and automatically provides proper flow angle away from floor to prevent staining or erosion. A full range of tamperproof flow settings, plus line testing and winterizing, is achieved by means of an internal spinner valve disc and O-Ring seal.

Hayward IMG, 8573 W. Buckeye Rd., Phoenix 85043 AZ

SP1424 & SP1425 – Head Loss (PSI)

Flow Rate (gpm)	10	20	30	40	50	60	70	80
Full Open	0	0	0	0	0	0.25	0.4	0.7
½ Open	0	0	0.25	0.5	0.7	1.0	1.5	2.1
¼ Open	0	0.25	0.5	1.3	2.5	3.5	-	-

Note: Follow proper hydraulic principles with regard to pipe size – 1 ½" pipe Max. flow 50gpm, 2" pipe Max. flow 85gpm

Hayward IMG, 8175 W. Buckeye Rd., Phoenix 85043 AZ