
S2

SMALL PUMP FOR OUTSTANDING RESULTS!





As defined by EN 17645. Go to report pages to see the complete detail by item.

TÜV NORD CERT GmbH Type Tested

CLASSIC LINE

3 YEARS OF WARRANTY

- **Exceptional performance**, one of the best in its category
- Ideal for small pools and above-ground pools
- Prefilter size: 1.1L



Easy access to the pre-filter through the quarter turn cover




Drainage caps to make wintering easier



50 mm outlet and ø 32/38 mm fluted adapters

	Code	Type HP	P2 (W) [1]	P1 (W) [2]	Amps (A) [3]	Total Length A (mm)	Flow rate (m³/h)*	Weight (kg)	Qty/pallet	(4)
SINGLE PHASE	S2-025ME2	0.25	235	360	1.6	504	6.5	7.9	32	IE2✓
	S2-033ME2	0.33	330	460	2	504	6.26	7.9	32	IE2✓
	S2-050ME2	0.5	440	580	2.6	504	9.71	8.8	32	IE2✓
	S2-075ME2	0.75	585	730	3.2	504	13	9.8	32	IE2✓
	S2-100ME2	1	690	860	3.8	504	15	9.8	32	IE2✓
	S2-150ME2	1.5	860	1050	4.6	540	18.75	12.3	32	IE2✓

[1] Nominal power of the motor P2 (W) [2] P1 Max (W) (Maximum consumption of the pump) [3] Amps at P1 Max (A) *8 m water column pressure (Please note that 0.25 HP info it is 6 mcw.) M.O.Q. :1 [4]The majority of our pumps already shift to IE2 motors. For some codes, we still have stock of pumps with IE1 motors and we will be shipping them until the end of the stocks. IE1 motors pumps codes, are the codes above without the E2 at the end.

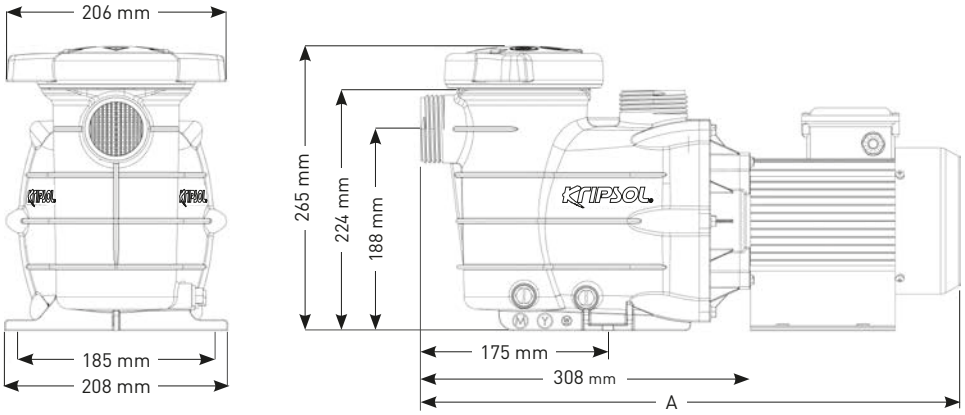

Technical Specifications	
Max. water temp.	35°C
Adapter	50 and 32/38 mm
Mechanical seal	AISI 304, suitable for salt water
Motor specifications	Class F, IPX5, 50Hz, 2 Poles
Housing/impeller/strainer/lid	PP+GF/PPO(Noryl®) / BRASS/PC

