



# HYDROVISTA

— P O O L S —

COMPLETE POOL EQUIPMENT SOLUTIONS

*We keep the world swimming*

# PRODUCT CATALOG

2026 - 27 EDITION

PUMPS

FILTERS

AUTOMATION

SANITIZATION

VALVES

MAIN DRAINS

SKIMMERS

POOL FITTINGS

AIR BLOWERS

HEATING & COOLING



# Complete pool equipment solutions, from one trusted source.

HydroVista Pools LLP is a Chennai-based supplier of professional pool equipment, serving contractors, builders and pool professionals across the region.

As an authorized dealer of Hayward®, we supply genuine equipment across every part of the pool plant room — pumps, filters, automation and cleaning — backed by technical guidance on selection and sizing for each project.

Whether you are building a residential pool, a hotel installation or a commercial facility, HydroVista is a single point of supply from specification through after-sales support.

#### HEADQUARTERS

**Manali, Chennai**

#### PARTNER BRAND

**Hayward® — Authorized Dealer**

#### PRODUCT RANGE

**Pumps · Filters · Automation · Cleaning**

#### WE SERVE

**Contractors · Builders · Commercial**

#### OUR MISSION

**Delivering exceptional products, outstanding service and innovative technology to create a better experience of water.**



# Built for contractors.

---

**01**

## **Genuine Hayward® equipment**

Factory-genuine products with full manufacturer warranty, sourced as an authorized dealer.

**02**

## **Single-source supply**

Pumps, filters, automation and cleaning from one supplier — one quote, one delivery, one point of contact.

**03**

## **Technical guidance**

Help with equipment selection and sizing for each project, from residential pools to commercial plants.

**04**

## **Project-friendly pricing**

Competitive contractor pricing with quotations tailored to your bill of quantities.

**05**

## **Local stock & delivery**

Based in Chennai for fast turnaround on supply and site delivery.

**06**

## **After-sales support**

Warranty coordination and support that continues well after handover.



# What's inside.

---

**01** PUMPS

---

**03** AUTOMATION

---

**05** VALVES

---

**07** SKIMMERS

---

**09** AIR BLOWERS

---

**02** FILTERS

---

**04** SANITIZATION

---

**06** MAIN DRAINS

---

**08** POOL FITTINGS

---

**10** HEATING & COOLING

---



HYDROVISTA POOLS

HAYWARD 100  
SINCE 1921

AUTHORIZED DEALER OF HAYWARD®

# 01 PUMPS

Energy-efficient circulation for every pool size — from residential single-speed to variable-speed and commercial-duty pumps.



Powerline™ PL Series

0.5 – 1.5 HP



Super II ECO®

0.75 – 3 HP



# Powerline™ PL Series

SINGLE SPEED PUMP · BY HAYWARD®

0.5 – 1.5 HP

Compact, quiet single-speed circulation for residential pools — dependable Hayward engineering in a value-focused package.

- Salt-compatible AISI 304S mechanical seal — suitable for salt chlorinator systems
- Class F motor with IP55 ingress protection
- 1.1 L prefilter basket behind a clear inspection lid
- 32/38 mm hose adapters; 1½" suction and discharge
- Corrosion-resistant PP+GF / PPO (Noryl®) / brass / PC construction



## ORDERING INFORMATION

MODEL NO.	RATED POWER	FLOW RATE*	IN / OUT	INPUT P1	WEIGHT
810046	0.5 Hp	30 gpm	1½" / 1½"	560 W	19.10 lbs
810056	0.75 Hp	40 gpm	1½" / 1½"	630 W	20.20 lbs
810066	1.0 Hp	48 gpm	1½" / 1½"	690 W	20.30 lbs
810076	1.5 Hp	56 gpm	1½" / 1½"	820 W	25.00 lbs

\* At 8 m total head · 120V/240V · 60 Hz · Single phase

## TECHNICAL SPECIFICATIONS

MAX. WATER TEMP 35 °C	ADAPTER 32 / 38 mm	MOTOR Class F · IP55
MECHANICAL SEAL AISI 304S · salt-compatible	PREFILTER BASKET 1.1 L	HOUSING / IMPELLER PP+GF / PPO / Brass / PC



# Super II ECO®

SINGLE SPEED PUMP · BY HAYWARD®

0.75 – 3 HP

High-performance, self-priming circulation for larger residential and semi-commercial pools — performance of a lifetime.

- Heavy-duty motor with advanced airflow ventilation for quieter, cooler operation
- Full-flow hydraulics — greater flow at lower operational cost
- Motor and drive group removable without disturbing pipe or mounting connections
- Large prefilter basket with tool-less removal for longer runs between cleanings
- Self-priming with suction lift up to 1.8 m above water level



## ORDERING INFORMATION

MODEL NO.	RATED POWER	FLOW RATE*	VOLTAGE · PHASE	IN / OUT
<b>SIIE2306</b>	¾ Hp	50 gpm	230V · 1 ph	1½"
<b>SIIE3206</b>	1 Hp	62 gpm	230V · 1 ph	1½"
<b>SIIE3506</b>	1½ Hp	101 gpm	230V · 1 ph	2"
<b>SIIE5306</b>	2 Hp	119 gpm	230V · 1 ph	2"
<b>SIIE5806</b>	3 Hp	136 gpm	230V · 1 ph	2"
<b>SIIE5836</b>	3 Hp	150 gpm	230V · 3 ph	2"

\* At 26.25 ft total head · 60 Hz

## TECHNICAL SPECIFICATIONS

<b>MAX. WATER TEMP</b> 40 °C	<b>MOTOR</b> 230V · 60 Hz · 2-pole · Class F	<b>INGRESS PROTECTION</b> IPX5
<b>CONNECTIONS</b> 40 / 50 mm	<b>RATED NOISE @ 1 M</b> < 70 dB(A)	<b>HOUSING / IMPELLER / LID</b> PP+GF / PPO (Noryl®) / PC



HYDROVISTA POOLS

HAYWARD 100  
SINCE 1921

AUTHORIZED DEALER OF HAYWARD®

# 02 FILTERS

Hi-rate sand filtration for crystal-clear water — top and side mount tanks for every pool type, salt water or standard chlorination.



SwimPro® Hi-Rate Sand

16" – 24"



Filters PL — Side & Top

14" – 36"



# SwimPro® Hi-Rate Sand Filter

HI-RATE SAND FILTER · BY HAYWARD®

16" – 24"

The secret to crystal-clear water — affordable, efficient filtration for in-ground pools of all types and sizes, in-ground spas, water features, ponds and fountains.

- Rugged, color-fast molded polymeric tank — resistant to all water treatment and weather conditions
- High-efficiency diffuser and 360° slotted lateral system for balanced flow
- Top or side mount options with included 6-position multi-port control valve
- Service-ease folding ball-joint laterals for simple servicing
- Sturdy injection-molded base for a perfect fit



## ORDERING INFORMATION

MODEL NO.	MOUNT	SIZE	FLOW*	FILTRATION AREA	SAND
SWIM400T	Top	16"	30 gpm	1.4 ft² / 0.12 m²	50 kg
SWIM500T	Top	21"	44 gpm	2.2 ft² / 0.20 m²	100 kg
SWIM600T	Top	24"	62 gpm	3.14 ft² / 0.28 m²	150 kg
SWIM500S	Side	21"	44 gpm	2.2 ft² / 0.20 m²	100 kg
SWIM600S	Side	24"	62 gpm	3.14 ft² / 0.28 m²	150 kg

\* Design flow rate based on 20 GPM/ft² · All models: 1½" multi-port valve · Sand shown in kg (100–300 lbs)

## TECHNICAL SPECIFICATIONS

<b>FILTER TYPE</b> Hi-Rate Sand	<b>FILTER TANK</b> One-piece molded polymeric	<b>WORKING PRESSURE</b> 35 PSI / 2.5 bar
<b>MEDIA</b> #20 silica sand · 0.45–0.55 mm	<b>UNDERDRAIN</b> Self-cleaning slotted laterals	<b>PERFORMANCE RANGE</b> 30–62 gpm · 6–14 m³/h



# Filters PL – Side & Top

SAND FILTER · POWERLINE BY HAYWARD®

14" – 36"

Robust, weather-resistant sand filtration for all pool types — above ground and in-ground, salt water or standard chlorination.

- High-density polyethylene tank — anti-corrosion, unaffected by water treatment products
- Supplied with VARI-FLO™ 6-way valve, pressure gauge and turbidity sight-glass
- Patented retractable collector arms fold back for easy maintenance
- Drain plug doubles as a dismantling tool · 3.5 bar maximum pressure



## ORDERING INFORMATION

REF.	SIZE	FLOW RATE*	FILTRATION AREA	SAND	IN / OUT
<b>FILTERS PL TOP</b>					
81100	14"	5 m <sup>3</sup> /h	0.10 m <sup>2</sup>	25 kg	1½"
81101	16"	7 m <sup>3</sup> /h	0.12 m <sup>2</sup>	50 kg	1½"
81102	18"	8 m <sup>3</sup> /h	0.16 m <sup>2</sup>	91 kg	1½"
81103	21"	10 m <sup>3</sup> /h	0.20 m <sup>2</sup>	100 kg	1½"
81104	24"	14 m <sup>3</sup> /h	0.28 m <sup>2</sup>	150 kg	1½"
81105	27"	17 m <sup>3</sup> /h	0.35 m <sup>2</sup>	160 kg	2"
81106	31"	22 m <sup>3</sup> /h	0.45 m <sup>2</sup>	250 kg	2"
81107 **	36"	30 m <sup>3</sup> /h	0.64 m <sup>2</sup>	350 kg	2"
<b>FILTERS PL SIDE</b>					
81113	21"	10 m <sup>3</sup> /h	0.20 m <sup>2</sup>	100 kg	1½"
81114	24"	14 m <sup>3</sup> /h	0.28 m <sup>2</sup>	150 kg	1½"

\* Based on 814 LPM/m<sup>2</sup> · \*\* Spherical shape

## TECHNICAL SPECIFICATIONS

MAX. WATER TEMP  
40 °C

OPERATING PRESSURE  
0.5 – 1.3 bar · max 3.5 bar

TANK  
Blown polyethylene · salt-safe

CONNECTIONS  
1.5" (81100–04) · 2" (81105–07)

FILTRATION MEDIA  
#20 silica sand · 0.4–0.55 mm

CONTROL VALVE  
VARI-FLO™ 6-way



HYDROVISTA POOLS

HAYWARD 100  
SINCE 1921

AUTHORIZED DEALER OF HAYWARD®

# 03 AUTOMATION

Smart-pool control for the modern backyard — schedule, monitor and control pumps, heaters, lighting and sanitization from anywhere.



OmniLogic™ Automation System

SMART-POOL



# OmniLogic™ Automation System

**THE MOST INTUITIVE SMART-POOL CONTROLLER · BY HAYWARD®**


**3-YEAR WARRANTY\***

Enjoy the luxuries of full control from the industry's most intuitive app, with effortless upgrades that always keep your backyard on the cutting edge.

- **Stay cutting edge** — unique architecture gives effortless access to the latest software upgrades, new capabilities, or restoration of previous configurations
- **Eliminate complexity** — the most intuitive, icon-based user interface on the market, right on the base unit
- **Easily expand** — simple expansion hardware makes it cost-effective to add features, from heaters to pumps to lighting
- Wall mount included for simple access



## CONTROL FROM ANYWHERE

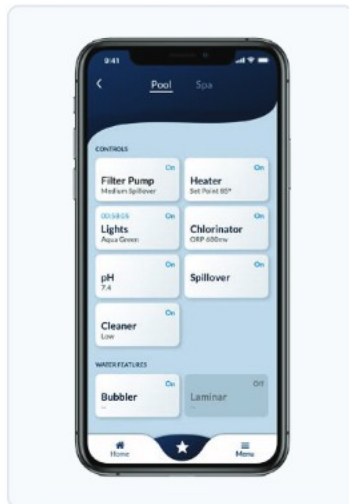

Seamlessly access your backyard wherever you are — OmniLogic puts every feature of the pool at your fingertips.

**MOBILE APPS**  
iPhone · iPad · Android

**REMOTES**  
Wireless & wired

**BASE UNIT**  
Icon-based touchscreen

**SMART HOME**  
Integrates with select systems

**CONTROLS**  
Pumps · heaters · lighting · sanitization

**EXPANSION**  
Water features · landscape lighting

\* 2 years + 1 year if purchased from a Totally Hayward Partner



HYDROVISTA POOLS

HAYWARD 100  
SINCE 1921

AUTHORIZED DEALER OF HAYWARD®

# 04 SANITIZATION

Effortless salt chlorination — disinfect your pool naturally with a pre-programmed, plug-and-play chlorinator.



Plug'n Clear Salt Chlorinator 20 – 80 m<sup>3</sup>



Automatic Chemical Feeders 4.2 – 9 lb



# Plug'n Clear Salt Chlorinator

CONNECT. TOUCH. RELAX. · WATER TREATMENT

20 – 80 m<sup>3</sup>

A DIY salt chlorinator that keeps your pool disinfected and disinfectant — pre-programmed for an intuitive, plug-and-play setup.

- Very easy installation — no gluing of the cell required
- Compatible with in-ground, above-ground pools and spas
- Large, clearly arranged interface with three tactile buttons
- Three operating modes including a temperature-dependent Smart mode
- Compact, attractive design for small technical facilities



## ORDERING INFORMATION

MODEL NO.	MAX PROD.	POOL VOL.	TITANIUM PLATES	POWER	OUTPUT
<b>PNCLEAR-05</b>	5 g Cl/h	20 m <sup>3</sup>	4	45 W	3 A · 14 V
<b>PNCLEAR-10</b>	10 g Cl/h	40 m <sup>3</sup>	7	85 W	5.5 A · 15 V
<b>PNCLEAR-20</b>	20 g Cl/h	80 m <sup>3</sup>	11	160 W	6.5 A · 23 V

Salt concentration 3 g/l NaCl · Self-cleaning polarity reversal · Temperature sensor included

## TECHNICAL SPECIFICATIONS

<b>POWER SUPPLY</b> 110–230 VAC · 50/60 Hz	<b>WATERPROOFING</b> IPX3	<b>BOX DIMENSIONS</b> 222 x 174 x 71 mm
<b>MODES</b> Manual · Boost · Smart	<b>MIN. FLOW · CELL Ø</b> 5 m <sup>3</sup> /h · 50 mm	<b>MAX. TEMP · PRESSURE</b> 45 °C · 4 kg/cm <sup>2</sup>

## ACCESSORIES

1.5" connector pack (2 units)	<b>GLX-DIY-CCN15</b>	2" connectors pack (2 units)	<b>GLX-DIY-CCN2</b>
50 mm glued connector pack	<b>SP3200UNKIT50</b>	63 mm glued connector pack	<b>SP3200UNKIT63</b>



# Automatic Chemical Feeders

**CHLORINATORS & BROMINATORS · BY HAYWARD®**

**4.2 – 9 lb**

Easy, economical sanitization for any pool — automatic chlorine or bromine feeders using large or small slow-dissolving tablets, in in-line and off-line configurations.

- 9- and 4.2-lb capacities fit in-ground and above-ground pools and spas of all sizes
- Large dial control valve for easy feed-rate adjustment
- EasyLok™ threaded cover for safe, convenient access to tablets
- Chemical-resistant Viton® seal and corrosion-resistant components for heavy-duty durability



## PERFORMANCE DATA

MODEL NO.	PIPE SIZE	CAPACITY	WIDTH	HEIGHT
<b>IN-LINE CHLORINATORS</b>				
<b>CL100</b>	1½" FIP	4.2 lbs	8¼"	15¼"
<b>CL200 *</b>	1½" FIP	9 lbs	9"	14¾"
<b>CL2002S **</b>	2" SKT	9 lbs	9"	14¾"
<b>OFF-LINE CHLORINATORS</b>				
<b>CL110</b>	—	4.2 lbs	6¾"	13"
<b>CL220</b>	—	9 lbs	8¼"	15½"
<b>OFF-LINE · ABOVE-GROUND ***</b>				
<b>CL110ABG</b>	—	4.2 lbs	6¾"	13"
<b>CL220ABG</b>	—	9 lbs	8¼"	15½"
<b>OFF-LINE BROMINATOR</b>				
<b>CL220BR</b>	—	9 lbs	8¼"	15½"

\* Includes mounting base · \*\* 2" inlet/outlet ports for 50–90 GPM flow · \*\*\* Packaged with universal adapter kit for all Hayward above-ground filter systems

## ACCESSORIES

Flush union connector · 1½" male nipple	<b>SP1500UNMPAK1</b>	Two flush union connectors · CL100/CL200	<b>SP1500UNPAK2</b>
---	----------------------	--	---------------------



HYDROVISTA POOLS

HAYWARD 100  
SINCE 1921

AUTHORIZED DEALER OF HAYWARD®

# 05 VALVES

---

Flow control for every plant room — ball valves, VariFlo™ multiport control valves, and PSV check & diverter valves.



**Ball Valves**  
TRIM SERIES



**VariFlo™ XL**  
MULTIPORT



**PSV Series**  
CHECK & DIVERTER



# Trim Ball Valves

2-WAY SHUT-OFF · BY HAYWARD®

UP TO 50 PSI

Reliable, economical shut-off valves for pool and spa plumbing — engineered for maximum flow efficiency.

- Designed for maximum flow efficiencies and pressure ratings up to 50 psi
- Dial handle for easy flow regulation and visual indication of valve setting
- Teflon® seats provide a dependable sealing surface
- Optional end connections — socket or threaded



## ORDERING INFORMATION

MODEL NO.	CONNECTION	TYPE
SP0722	Socket x Socket	2-way
SP0723	Socket x Male thread	2-way
SP0722S	Socket x Socket · union	2-way
SP0724S	Union connection · 127 mm / 5.01"	2-way

## TECHNICAL SPECIFICATIONS

<p>MAX. PRESSURE</p> <p><b>50 psi</b></p>	<p>HANDLE</p> <p><b>Dial — visual indication</b></p>	<p>SEATS</p> <p><b>Teflon®</b></p>
---	--	------------------------------------



# VariFlo™ XL Multiport Valve

MULTIPOINT CONTROL VALVE · BY HAYWARD®

UP TO 7 FUNCTIONS

The professional's choice in multiport valves — reinforced thermoplastic and engineered for maximum flow. An easy lever-action handle dials up to seven functions: filter, backwash, waste, rinse, closed, winter or recirculate.

- Hydro-engineered for superior flow at lower pressure drops — more efficient filtration at equivalent horsepower
- Rugged off-set ports for easy plumbing
- Built-in sight glass for convenient backwash viewing
- Injection-molded valve key assembly with molded gasket for a reliable seal



## ORDERING INFORMATION

MODEL	PIPE SIZE	MOUNTING	POSITIONS	FILTER
<a href="#">SP071621</a>	2" FIP	Top	6	Sand
<a href="#">SP0714T</a>	1½" FIP	Top	7	Sand
<a href="#">SP0715ALL</a>	2" FIP	Side	6	Sand or D.E.
<a href="#">SP0715X62</a>	2" FIP	Side	6	Sand
<a href="#">SP0710XALL</a>	1½" FIP	Side	6	Sand or D.E.
<a href="#">SP0710X62</a>	1½" FIP	Side	6	Sand
<a href="#">SP0740DE</a>	2" SKT	Side	4	D.E.
<a href="#">SP0715XR50</a>	2" FIP	Side	6	D.E.
<a href="#">SP0710XR50</a>	1½" FIP	Side	6	D.E.

Functions: filter · backwash · waste · rinse · closed · winter · recirculate



# PSV Check & Diverter Valves

CPVC / PVC · BY HAYWARD®

MAINTENANCE-FREE

Simple, maintenance-free water-flow management. Durable CPVC body and lid construction give greater heat tolerance — preventing warping and leaks in the most demanding environments.

- Corrosion-resistant materials for extended service life
- Available as check, 2-way and 3-way diverter valves
- PSV3SM / PSV3SMDGR feature externally threaded ports with union fitting included



## CHECK VALVES

MODEL	PIPE SIZE	MATERIAL
<b>PSCV2S</b>	1½" × 2"	CPVC
<b>PSCV2S2</b>	2" × 2½"	CPVC
<b>PSCV2SDGR</b>	1½" × 2"	PVC
<b>PSCV2S2DGR</b>	2" × 2½"	PVC

## 2-WAY DIVERTERS

MODEL	PIPE SIZE	MATERIAL
<b>PSV2S</b>	1½" – 2"	CPVC
<b>PSV2S2</b>	2" – 2½"	CPVC
<b>PSV2SDGR</b>	1½" – 2"	PVC
<b>PSV2S2DGR</b>	2" – 2½"	PVC

## 3-WAY DIVERTERS

MODEL	PIPE SIZE	MATERIAL
<b>PSV3S</b>	1½" – 2"	CPVC
<b>PSV3S2</b>	2" – 2½"	CPVC
<b>PSV3SM</b>	External union thread	CPVC
<b>PSV3SDGR</b>	1½" – 2"	PVC
<b>PSV3S2DGR</b>	2" – 2½"	PVC
<b>PSV3SMDGR</b>	External union thread	PVC

DGR = grey PVC · CPVC offers greater heat tolerance · Union fitting SP1500UNPAK1 included with PSV3SM / PSV3SMDGR



HYDROVISTA POOLS

HAYWARD 100  
SINCE 1921

AUTHORIZED DEALER OF HAYWARD®

# 06 MAIN DRAINS

WG-Series suction outlets, frames & covers — compliant with ASME/ANSI A112.19.8 and the Virginia Graeme Baker Pool & Spa Safety Act.



WG-Series Suction Outlets

VGB COMPLIANT



# WG-Series Suction Outlets

FRAMES, COVERS & DRAINS · BY HAYWARD®

ASME · VGB

Industry-approved suction outlets and covers for concrete or vinyl/fibreglass pools — available in a wide range of styles, sizes and colours for any installation.

- Complies with ASME/ANSI A112.19.8-2007 and the Virginia Graeme Baker Pool & Spa Safety Act
- Tested against hair, body and finger entrapment with improved UV stability
- ASME/ANSI & VGB embossment on every drain cover for verified compliance
- White, black and gray colour options · brass insert & screw kit for all frames



## FRAMES & COVERS

MODEL NO.	SIZE	DESCRIPTION	FLOW (GPM)
<a href="#">WG1030AVPAK2</a>	8" dia	2-pak frame & cover, white	125
<a href="#">WG1030AVBKPAK2</a>	8" dia	2-pak frame & cover, black	125
<a href="#">WG1030AVGRPAAK2</a>	8" dia	2-pak frame & cover, gray	125
<a href="#">WG1032PAK2</a>	12 × 12	Cover, inner & outer frame	256 / 112
<a href="#">WG1033PAK2</a>	18 × 18	Cover, inner & outer frame	560
<a href="#">WGX1031B</a>	9 × 9	Replacement cover & inner frame	112 / 83

Two flow values = floor (horizontal) / wall (vertical) rating · WG1048EKIT brass insert & screw kit available for all frames

## SUCTION OUTLETS & DUAL SUMPS

MODEL NO.	SIDE	BOTTOM	DESCRIPTION
<a href="#">WG1048AVPAK2</a>	1½"	—	Dual sumps & covers, vinyl / fibreglass
<a href="#">WG1049AVPAK2</a>	2"	—	Dual sumps & covers, vinyl / fibreglass
<a href="#">WG1051AVPAK2</a>	1½"	1½"	Dual sumps & covers, concrete
<a href="#">WG1052AVPAK2</a>	2"	1½"	Dual sumps & covers, concrete
<a href="#">WG1053AVPAK2</a>	1½"	2"	Dual sumps & covers, concrete
<a href="#">WG1054AVPAK2</a>	2"	2"	Dual sumps & covers, concrete

## ACCESSORIES

Spring-loaded hydrostatic relief valve · 1½", 2" [SP1056](#)

Main-drain collector tube · 12" long

[SP1055](#)



HYDROVISTA POOLS

HAYWARD 100  
SINCE 1921

AUTHORIZED DEALER OF HAYWARD®

# 07 SKIMMERS

---

Surface skimming for concrete and liner pools — from the classic MasterFlo 3110 to the next-generation X-Pro 600 with infinity effect.



MasterFlo 3110

CONCRETE



X-Pro 600 CONCRETE · LINER · FIBREGLASS



# MasterFlo 3110 Skimmer

CONCRETE POOL SKIMMER · BY HAYWARD®

ANTI-UV ABS

An elegant, functional surface skimmer for concrete pools — high-quality ABS with anti-UV treatment for lasting performance.

- Non-slip lid with easy-access strainer
- 1.5" and 2" bottom ports with bottom flow regulation
- 32 mm overflow connection port
- Extensions available to raise the lid frame



## TECHNICAL SPECIFICATIONS

<b>POOL TYPE</b> Concrete	<b>BOTTOM PORTS</b> 1.5" & 2"	<b>OVERFLOW PORT</b> 32 mm
<b>MOUTH OPENING</b> 190 mm · 127 mm high	<b>OVERALL HEIGHT</b> 436 mm	<b>MATERIAL</b> High-quality anti-UV ABS



# X-Pro 600 Skimmer

SHIFT YOUR POOL TO THE NEXT LEVEL · X-LINE

3-YEAR WARRANTY

A high-volume, connectivity-ready skimmer with an infinity effect — just 5.5 cm from deck to floating line — for complete integration into the modern backyard.

- 3-litre strainer for reduced maintenance · buffer & stabiliser system prevents overflow
- Fillable lid with tile & latch and safety lock · anti-entrapment mouth
- Level-sensor ready — manages pool refill via the AquaRite® range
- Height-adjustable cover frame with pre-cut marks · EN 13451-3, EN 16713-2, EN 16582-1, AS 1926.3



## ORDERING INFORMATION

ITEM	POOL FINISH	COLOUR	FLOW	INSERTS	BOTTOM PORTS
<b>X600CW</b>	Concrete	White*	6–16 m <sup>3</sup> /h	—	1.5" / 2" / 2.5"
<b>X600LW</b>	Liner	White	6–16 m <sup>3</sup> /h	—	1.5" / 2" / 2.5"
<b>X600LDGR</b>	Liner	Dark grey	6–16 m <sup>3</sup> /h	—	1.5" / 2" / 2.5"
<b>X600LLG</b>	Liner	Light grey	6–16 m <sup>3</sup> /h	—	1.5" / 2" / 2.5"
<b>X600LSA</b>	Liner	Sand	6–16 m <sup>3</sup> /h	—	1.5" / 2" / 2.5"
<b>X600LIW</b>	Liner	White · inserts	6–16 m <sup>3</sup> /h	Yes	1.5" / 2" / 2.5"
<b>X600LIDGR</b>	Liner	Dark grey · inserts	6–16 m <sup>3</sup> /h	Yes	1.5" / 2" / 2.5"
<b>X600LILG</b>	Liner	Light grey · inserts	6–16 m <sup>3</sup> /h	Yes	1.5" / 2" / 2.5"
<b>X600LISA</b>	Liner	Sand · inserts	6–16 m <sup>3</sup> /h	Yes	1.5" / 2" / 2.5"
<b>X600PIW</b>	Fibreglass 6°	White · inserts	6–16 m <sup>3</sup> /h	Yes	1.5" / 2" / 2.5"

All models: 50 mm overflow port · \* Concrete model does not include trim, flange, gaskets or hardware (available separately)

## X-LINE ACCESSORIES

Fillable lid with tile & latch (4 colours)	<b>XFLID</b>	Height-adjustable cover frame (4 colours)	<b>XCF</b>
Level sensor	<b>XLSENSOR</b>	PCF20 cable conduit M20 x ¾"	<b>0613000002000</b>



HYDROVISTA POOLS

HAYWARD 100  
SINCE 1921

AUTHORIZED DEALER OF HAYWARD®

# 08 POOL FITTINGS

Inlets, return fittings, plugs and spa hydrotherapy fittings —  
high-quality, UV-resistant ABS built to the highest standards.





# Pool & Spa Fittings

INLETS · RETURNS · PLUGS · HYDROTHERAPY · BY HAYWARD®

WHITE ABS



Inlets &amp; Returns



SP-1419B Hydrostream 3/8" ope

Directional Flow



Jet-Air® III Spa

## WALL & FLOOR INLETS

MODEL	DESCRIPTION
SP-1424	Adj. wall inlet · 1½" FIP x 2" MIP
SP-1424S	Adj. wall inlet · 1½" SKT x 2" MIP
SP-1425	Adj. floor inlet · 1½" FIP x 2" MIP
SP-1425S	Adj. floor inlet · 1½" SKT x 2" MIP

## DIRECTIONAL FLOW · HYDROSTREAM

MODEL	DESCRIPTION
SP-1419B	Hydrostream · 3/8" opening
SP-1419C	Hydrostream · 1/2" opening
SP-1419D	Hydrostream · 3/4" opening
SP-1419E	Hydrostream · 1" opening

## EYEBALL & VACUUM FITTINGS

MODEL	DESCRIPTION
SP1418D	Eyeball · 1½" MIP · 3/4" opening
SP1422D	Eyeball · 1½" slip · 3/4" opening
SP1422E	Eyeball · 1½" slip · 1" opening
SP-1022	Vacuum fitting · 1½" FIP
SP-1022S	Vacuum fitting · 1½" Socket

## PLUGS, DRAINS & INSERTS

MODEL	DESCRIPTION
SP-1019	Gutter drain · 2" FIP + 2" SKT
SP-1022-C	All-purpose plug · 1½" · with O-ring
SP-1022-B	Flush plug · 1½" · with gasket
SP-1026	Grate insert · 1½" MIP
SP-1434	Jet-Air® III spa hydrotherapy fitting



HYDROVISTA POOLS

HAYWARD 100  
SINCE 1921

AUTHORIZED DEALER OF HAYWARD®

# 09 AIR BLOWERS

Quiet, durable spa air blowers — powering the bubbles for hydrotherapy and whirlpool systems, indoors or out.



Spa Blower

1.0 – 2.0 HP



# Spa Blower

QUIET PERFORMANCE · HASSLE-FREE INSTALL · BY HAYWARD®

1.0 – 2.0 HP

An innovative, durable spa blower delivering quiet performance with one of the industry's easiest installations — suitable for both indoor and outdoor use.

- Durable motor with thermal switch and replaceable brushes for extended life
- Full spring check valve prevents water from reaching the motor
- Unique rubber motor base for extremely quiet operation
- Mounting bracket for convenient, simple installation
- High-impact design ensures smooth operation even at low temperatures



## ORDERING INFORMATION

MODEL NO.	HORSEPOWER	VOLTAGE	WARRANTY
SPB101	1.0 HP	115V	1 year
SPB102	1.0 HP	230V	1 year
SPB151	1.5 HP	115V	1 year
SPB152	1.5 HP	230V	1 year
SPB201	2.0 HP	115V	1 year
SPB202	2.0 HP	230V	1 year

Available in 115V and 230V across multiple horsepowers for maximum versatility · 50/60 cycle

## TECHNICAL SPECIFICATIONS

<b>USE</b> <b>Indoor &amp; outdoor</b>	<b>MOTOR</b> <b>Thermal switch · replaceable brushes</b>	<b>CHECK VALVE</b> <b>Full spring check valve</b>
<b>MOUNTING</b> <b>Bracket included</b>	<b>NOISE CONTROL</b> <b>Rubber motor base</b>	<b>WARRANTY</b> <b>1 year</b>



HYDROVISTA POOLS

HAYWARD 100  
SINCE 1921

AUTHORIZED DEALER OF HAYWARD®

# 10 HEATING & COOLING

Energy-efficient inverter heat pumps that extend your swim season — up to 50% more efficient and 10x quieter than traditional heat pumps.



HeatPro® VS

54K – 140K BTU



HydraHeat Inverter

11.7 – 28.6 kW



# HeatPro® VS Variable-Speed

**ENERGY-EFFICIENT HEAT PUMP · BY HAYWARD®**

**UP TO 50% SAVINGS**

A high-performance variable-speed heat pump that quietly and economically maintains your ideal water temperature — with 50% higher energy savings than traditional heat pumps.

- Super-quiet inverter compressor — up to 10x quieter than traditional heat pumps
- Soft-start technology ramps from zero for stable current and lower consumption
- Operates at low ambient temperatures to extend the swimming season
- Titanium heat exchanger · intuitive control panel · AHRI certified



## SPECIFICATIONS

MODEL NO.	HP55	HP60	HP80	HP115	HP140
BTU heating*	54,000	60,000	79,000	115,000	140,000
C.O.P. (heating)	4.9	5.1	5.3	5.0	5.0
Water flow (min/max)	14/35	16/40	18/50	24/70	31/88
Min. circuit amps	24	25	32	45	50
Weight (lbs)	132	151	192	240	273
Refrigerant	R410A	R410A	R410A	R410A	R410A

Model suffix CLEE1 · \* BTU at 80/80/80 (air/water/humidity) · Power 208–230/1/60 · Rotary compressor · Water flow in GPM

## WARRANTY

**PARTS & LABOUR**  
**3 years**

**TITANIUM HEAT EXCHANGER**  
**5 years (part only)**



# HydraHeat Inverter Heat Pump

**DC INVERTER · WIFI · BY HAYWARD®**

**25-YR\* EXCHANGER**

Quiet operation and a sleek design that saves you money while extending your swim season — DC inverter technology that adjusts power to the needs of the pool.

- Variable-speed fan runs at very low speed for a quiet night-time mode
- Digital colour touchscreen shows real-time power consumption · WiFi connectivity
- Soft-start from 0° for stable current and lower energy consumption
- Operates down to -7 °C ambient — swim earlier in spring and later in autumn



## SPECIFICATIONS

MODEL NO.	HEAT kW	C.O.P.	POWER kW	WEIGHT	dB(A)
<a href="#">1H-PASRW030EE12</a>	11.66	16.1–5.45	0.12–1.99	46 kg	42–53
<a href="#">1H-PASRW040EE17</a>	17.0	16.4–5.86	0.18–3.12	60 kg	43–54
<a href="#">1H-PASRW050EE19</a>	18.7	16.0–5.12	0.22–3.65	70 kg	43–55
<a href="#">1H-PASRW060EE24</a>	24.6	16.0–6.9	0.54–3.89	92 kg	45–56
<a href="#">1H-PASRW070EE29</a>	28.6	16.1–6.3	0.61–4.17	96 kg	45–57
<a href="#">1H-PASRW070EE35</a>	28.6	16.0–5.5	0.64–5.90	93 kg	45–57
<a href="#">1H-PASRW080EE32</a>	34.94	16.1–5.35	0.46–6.53	120 kg	48–56

Single-phase 220–240V / 50Hz & three-phase 380–415V / 50Hz models · Refrigerant R32 · Noise measured at 1 m



# HYDROVISTA POOLS LLP

*We keep the world swimming*

## ADDRESS

Old No: 225/227, New No: 44, Ground Floor,  
Srinivasan Street, Manali, Chennai – 600 068

## WHATSAPP

+91 80898 66471

## EMAIL

hydrovistapools@gmail.com

## WEBSITE

www.hydrovistapool.com

## SOCIAL

Instagram · @hydrovistapools

Facebook · Hydrovista Pools

## LEADERSHIP TEAM

---

### **Sarath Shaji**

Director · Operations & Business Support

### **K. V. Aneesh**

Director · Projects, Strategy & Business Growth

### **Athul Prasanth**

Director · Technical, Procurement & Product Solutions

### **Ashwin Prasanth**

Director · Sales, Marketing & Brand Development

---

AUTHORIZED DEALER OF HAYWARD®

 HAYWARD® 100  
SINCE 1925